




Hanging the Unit

Attach the provided flat mount plate with receiver bracket onto a pole or wall using either the for corner holes and appropriate screws for the material or your choice of band clamp slotted through the slots in the plate. (Four 3" wood screws are provided, alternative screws and/or clamps must be provided by customer based on specific mounting conditions.)



Make sure the pin is removed from the bracket on the back of the unit and then slide down over the receiver bracket. You may wish to apply some form of lubricant to help prevent binding during attachment and removal. Slide in the locking pin.

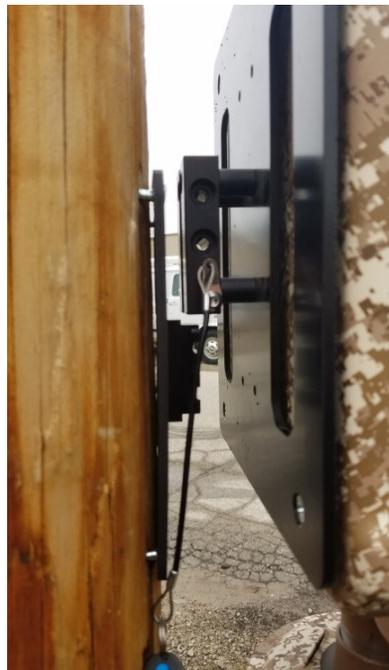



Powering the Unit On

The unit can be powered on using primary power (AC input) or using the internal backup batteries. Please note that while specific up time for battery life depends on the specific unit type, only 12 hours of operation is guaranteed for two (2) fully charged batteries. Internal batteries will recharge when primary AC power is supplied and if properly plugged into the internal chargers.

To begin, plug in the unit, and then open the cover. One at a time, pull out the batteries and confirm they are plugged into the charger located under the specific battery and that the rocker switch of the battery is turned on (it should light up). Re-seat the batteries. Finally, flip up the toggle switch on the power supply to turn the unit on. Close and re-latch the cover.

